



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification:</b> A61L 31/02, A61L 31/08, A61L 31/12	<b>A1</b>	<b>(11) International Publication Number:</b> WO 00/64506 <b>(43) International Publication Date:</b> 02 November 2000 (02.11.2000)
<b>(21) International Application Number:</b> PCT/US00/11092 <b>(22) International Filing Date:</b> 21 April 2000 (21.04.2000) <b>(30) Priority Data:</b> 09/298,545 23 April 1999 (23.04.1999) US <b>(60) Parent Application or Grant</b> HEALTHSHIELD TECHNOLOGIES L.L.C. [/]; (). BARRY, John, E. [/]; (). TROGOLO, Jeffrey, A. [/]; (). TODARO, John, C.; ().	<b>Published</b>	
<b>(54) Title: STENT HAVING ANTIMICROBIAL AGENT</b> <b>(54) Titre: EXTENSEUR POURVU D'UN AGENT ANTIMICROBIEN</b>  <b>(57) Abstract</b> <p>A medical stent having an inorganic antimicrobial agent on a surface, the agent preferably being a zeolite. The stent can be of metal or a polymer and the agent being in a coating that is applied to one or both of the surfaces of the stent. The stent can be of a polymer resin incorporating the agent.</p> <b>(57) Abrégé</b> <p>L'invention concerne un extenseur médical dont une surface est pourvue d'un agent antimicrobien inorganique, l'agent étant de préférence un zéolite. L'extenseur peut être fait d'un métal ou d'un polymère et l'agent peut se présenter comme un revêtement appliqué à une ou aux deux surfaces de l'extenseur. L'extenseur peut être en résine polymère avec l'agent incorporé.</p>		

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : A61L 31/02, 31/08, 31/12	A1	(11) International Publication Number: WO 00/64506 (43) International Publication Date: 2 November 2000 (02.11.00)
<p>(21) International Application Number: PC17US00/11092</p> <p>(22) International Filing Date: 21 April 2000 (21.04.00)</p> <p>(30) Priority Data: 09/298,545 23 April 1999 (23.04.99) US</p> <p>(71) Applicant: HEALTHSHIELD TECHNOLOGIES L.L.C. [US/US]; Suite 201, 67 Prospect Avenue, West Hartford, CT 06106 (US).</p> <p>(72) Inventors: BARRY, John, E.; 18 Drake Lane, Derry, NH 03038 (US). TROGOLO, Jeffrey, A.; 228 Commonwealth Avenue, Boston, MA 02116 (US).</p> <p>(74) Agents: TODARO, John, C. et al.; Darby &amp; Darby P.C., 805 Third Avenue, New York, NY 10022-7513 (US).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>
<p>(54) Title: STENT HAVING ANTIMICROBIAL AGENT</p> <p>(57) Abstract</p> <p>A medical stent having an inorganic antimicrobial agent on a surface, the agent preferably being a zeolite. The stent can be of metal or a polymer and the agent being in a coating that is applied to one or both of the surfaces of the stent. The stent can be of a polymer resin incorporating the agent.</p>		

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Description**

5

10

15

20

25

30

35

40

45

50

55

5

10

5

## STENT HAVING ANTIMICROBIAL AGENT

15

Field of the Invention

The invention relates to a medical stent having antimicrobial properties.

20

10

Background of the Invention

25

15

30

20

35

Stents are devices widely used in the medical field. For example, there are coronary and peripheral artery stents made of metal, such as stainless steel, NiTi or tungsten. Typical of these are of the type shown in U.S. patent 5,690,670. These stents also can be of metal coated with a polymer, such as polyurethane, or coated with a material such as silicone rubber. Typical of these are stents shown in U.S. Patent 5,713,949. Biliary, esophageal, urinary and urethral stents often are of polymeric material. Stents of a polymer material are shown in U.S. Patents 5,713,949 and 5,607,467.

40

25

45

30

50

Most, if not all, of such stents are subject to contact with body fluids, such as blood, and with body tissue, such as arterial vessels. The materials contacting the stent are potential sources of contamination by bacteria. Also, the stent itself is a potential site for bacteria growth. Therefore, it would be desirable to provide the stent with antimicrobial properties. That is, it would be desirable that bacteria in the body fluids and tissue contacting the stent are killed. Providing the antimicrobial properties preferably should be done in a manner which does not increase build-up of solid materials deposited on the stent and, more preferably, should reduce such build-up. Also, providing the stent with antimicrobial properties should

55

5 not adversely affect the stent deployment characteristics or its mechanical properties.

10 The general subject of attempting to provide antimicrobial action for medical type products to be used in the body has been considered. For  
5 example, U.S. Patent 5,906,466 describes an antimicrobial composition comprising antimicrobial silver compounds deposited on a physiologically inert oxide support material. In Japanese patent abstract No. 08041611 an alloy  
15 exhibiting antimicrobial properties is disclosed.

#### 10 Brief Description of the Invention

20 The present invention relates to a medical stent having antimicrobial properties. For a metal stent, in one embodiment a coating of a material with the antimicrobial agent is applied to the stent. For example, for  
25 the metal stent, the coating is of an adhesive type material, such as a hydrophilic polyurethane, which contains the antimicrobial agent. In another  
15 embodiment of a metal stent, the agent is applied to the metal stent as a powder coating. The coating can be applied to either both of the stent inner and outer surfaces.  
30

For polymer stents, the agent can be blended into the polymeric  
20 resin that forms the stent. Thus, antimicrobial agent is present on both the stent inner and outer surfaces. Here also, a stent of resin material can have a  
35 coating containing the agent applied to one or both of its inner and outer surfaces.

40 In a preferred embodiment of the invention, the antimicrobial agent is of inorganic material, preferably a zeolite.  
25

#### 45 Objects of the Invention

It is therefore an object of the invention to provide a medical  
stent having antimicrobial properties.

30 Another object is to provide a medical stent one or both of whose inner and outer surfaces is coated with an inorganic antimicrobial  
50

5 agent.

A further object is a medical stent containing a zeolite as an antimicrobial agent.

10 Still an additional object is to provide a medical stent made of  
5 resin containing an inorganic antimicrobial agent.

Yet another object is to provide a medical stent having a coating containing an inorganic antimicrobial agent.

15

#### Brief Description of the Drawings

10 Other objects and advantages of the present invention will  
20 become more apparent upon reference to the following specification and annexed drawings in which:

Fig. 1 is a view of a typical medical stent of metal; and

25 Figs. 2 and 3 respectively show a plan view of a blank of  
15 material for a stent and a stent made from the blank.

#### Detailed Description of the Invention

30

Fig. 1 shows a metal stent of the type disclosed in U.S. Patent 5,690,670. This is illustrative of any type of metal stent with which the  
20 present invention can be utilized. The stent 160 of Fig. 1 is of the  
35 expandable type and is shown in a non-expanded state positioned on the distal end of a balloon expandable segment 162 of a guide wire 164. The stent 160 is fabricated from a suitable material such as stainless steel, NiTi, tungsten, Ti-Nb-Zr alloy or any other suitable material. The stent illustrated is  
40 designed so that it can be collapsed over a balloon segment of a balloon catheter.

45

The stent is positioned within a segment of a tubular body conduit 165, a blood vessel for example, to be propped open. Expansion of the balloon 162 expands the stent 160 radially outward up to the blood  
30 vessel wall 166 so that means for gripping soft tissue, such as barbs (not shown), on the outer surface of the stent 160, engage and grip blood vessel  
50

55

5 tissue to anchor the stent 160 in position. The balloon 162 is then collapsed  
and removed leaving the stent. In this way, the blood vessel is permanently  
propped open. As seen, the stent is in a position where it is contacted both  
10 by blood and body tissue.

5 In accordance with the invention one or both of the stent inner  
and outer surfaces has a coating 200 of a material containing an antimicrobial  
agent, which is described in detail below. It is preferred that at least the  
15 outer surface be coated with the material containing the agent since this  
comes into contact with the body tissue. The process for coating and the  
10 material are described below.

20 The metal stent described in Fig. 1 for a blood vessel is only  
illustrative of the type of stent with which the subject invention can be  
employed. It is also applicable to urinary, gastrointestinal, and other stent  
25 applications. The stent can be of any shape, size and metal suitable for the  
15 application.

30 Figs. 2 and 3 show a stent of the type disclosed in U.S. Patent  
5,713,949. As shown from Fig. 2, the stent starts as a flat piece of material  
1 that has a top edge 2, a bottom edge 3 and ends 4 and 5. The piece 1  
includes rows of slots 6, 7 which are offset from each other. The material of  
20 piece 1 is a resin, such a polyethylene, polyurethane, polytetrafluoroethylene,  
35 silicone, block co-polymers of polyurethane and other suitable resins. These  
materials can be molded in a suitable die to produce the desired shape and  
slots 6, 7.

40 As seen in Fig. 2, the piece 1 is formed into a cylindrical stent  
25 with the edges 2, 3 attached together by any suitable means such as, for  
example, by surface fusing, ultrasonic welding or any other suitable  
technique. It should be noted that the material for piece 1 can be of metal.  
45 Here, the slots 6, 7 can be formed by laser etching or other suitable  
technique.

30 For stents of a polymer material the agent can be incorporated  
50 directly into the resin used to make the stent. A coating containing the agent



5 also can be applied to one or both of its surfaces.

Processes for making the different types of stents are described below.

10 Coated Stents - For a metal stent, the inorganic antimicrobial agent preferably is applied as a coating. A coating with the agent also can be applied to a stent of polymeric material, such as of Figs. 2 and 3. In either case, the coating must be adherent and flexible, the latter to accommodate flexing, bending and compression of the stent. Typical thickness for the coatings are from between about 1 - 15 microns, preferably, between about 1 - 10 microns and most preferably between about 1 - 5 microns.

20 Coatings of a polymer containing the agent are preferred for both the metal and polymeric stents. These can be bonded to the stent, that is, the coating is effectively adhesively bonded to the stent. The polymers for the coating can be of silicone rubber and hydrophilic polymers. A preferred 25 coating can be of, for example, a hydrophilic polymer such as hydrophilic polyurethane or a hydrophilic polymer material having a lubricious property, such as shown in U.S. Patent 5,731,087. The antimicrobial agent preferably comprises zeolite ceramic particles mixed with the coating material. That is, the zeolite particles are blended in the desired amount into the coating 30 material.

35 The agent particles comprise by weight of the coating between about 0.1% - 100% , more preferably between about 0.1% - 75% and most preferably between about 0.5%-50.0%. The size of the particles of the agent is preferably about 1.0 micron in nominal diameter.

40 25 The coating with the agent is applied by any suitable technique, such as spraying, painting or dipping the metal or resin stent into the coating material. This can be done either while the material piece forming the stent is flat or after it has its cylindrical shape. By using painting or spraying the coating with the agent can be applied to only one of the stent inner or outer 45 surfaces. Heat and/or pressure is applied and roughening or etching of the surface is performed as needed depending upon the stent and coating 50

5

materials.

## 1. Polymeric stent with coating:

10

5

resin for stent

any suitable resin such as  
polyurethane, polyvinylchloride

coating

Hydrophilic polyurethane, silicone  
rubber adhesives

15

10

agent

0.1 to 5.0 wt% Ag in zeolite

wt%

0.1 to 100.0, more preferably 0.5 to  
75.0 and most preferably 1.0 to 50.0  
of agent in the coating

20

15

size of agent particles

1.0 microns

25

20

## 2. Metal stent that is coated:

stent material

NiTi, stainless steel, Ti-Nb-Zn,  
tungsten, tantalum

30

25

coating

hydrophilic polyurethane, silicone  
rubber adhesives

agent

0.1 to 5.0 wt% in Ag in zeolite

35

30

wt%

0.1 to 100.0, more preferably 0.5 to  
75.0 and most preferably 1.0 to 50.0  
of agent in the coating

size of agent particles

1 micron

40

35

## 3. Metal stent with resin coating containing antimicrobial agent:

stent material

NiTi, stainless steel, TiNb-Zn, tungsten,  
tantalum

45

40

coating

hydrophilic polyurethane, silicone  
rubber adhesives

50

45

agent

0.1 to 5.0 wt% Ag in zeolite

55

5		wt%	0.1 to 20.0, more preferably 0.5 to 10.0 and most preferably 0.5 to 5.0 of agent in the coating
10	5	size of agent particles	1.0 micron

15 Metal stents 2 and 3 above involve coating the metal with the polymer leaving the spaces 6, 7 of Figs. 2 and 3 between the metal struts free. In contrast, metal stent 3 above is a metal stent that is completely covered by a polymer containing the zeolite.

20 For a metal stent, a powder coating process also can be used to apply the coating containing the antimicrobial agent. A powder coating process usually comprises the basic steps of cleaning the metal, 15 electrostatically spraying the powder onto the metal, and baking. One or both of the stent surfaces can be powder coated. Here, particles of the inorganic antimicrobial, such as the ceramic particles, can be incorporated into the 25 powder, blended directly with the powder or applied in a second step to the surface of a powder coated part before the baking step.

30 20 Incorporation of the inorganic antimicrobial agent into the powder to be sprayed can be accomplished in any suitable way. For example, it can be done by preparing a master batch concentrate of the resin particles containing the agent particles. That is, the zeolite ceramic particles are also 35 made in a base resin, such as polyethylene, polyurethane, etc. These resin particles containing the zeolite ceramic, are then blended into the polymer or 25 coating material, such as by kneading or rolling to form pellets having the agent in a desired concentration. This preferably is between 0.1 to 30% by weight, preferably 0.5 to 15%, and most preferably 1 to 10% of the pellets. 40 The size of the resin containing zeolite particles in the pellets preferably is about 1.0 micron. The pellets are then ground or melt atomized to produce a 45 30 powder that is used directly in the spray powder coating process. Also, the mixture can be diluted with untreated powder normally used in the conventional powder coating process. An illustration of a metal stent that is 50 powder coated follows.

5

## 4. Metal stent that is powder coated:

10

5

stent material	NiTi, stainless steel, Ti-Nb-Zn, tungsten, tantalum
----------------	---

powder	silica
--------	--------

15

10

agent	0.1 to 5.0 wt% Ag in zeolite
-------	------------------------------

wt% of zeolite in powder	0.1 to 100.0, more preferably 0.5 to 75.0 and most preferably 1.0 to 50.0 of agent in the powder for coating
--------------------------	--

20

15

size of agent particles	1.0 micron
-------------------------	------------

25

20

An alternate method is to combine untreated polymer powder with a solution of an appropriate solvent, with or without a binder, and particles of the inorganic antimicrobial to coat the polymer powder particles with the inorganic antimicrobial agent particle. The solvent is then evaporated and the resulting powder composite is used in the conventional powder coating process ensuring that the inorganic antimicrobial is exposed at the surface. Here, the particle size of the ceramic resin particles of the agent also preferably is about 1.0 micron nominal diameter.

35

30

Another method of producing an antimicrobial powder coating is to apply a polymer powder in the conventional manner to the stent surface or surfaces and then apply particles of the inorganic antimicrobial agent in a solvent or water. The stent is then dried and, as in the conventional powder coating process, the inorganic antimicrobial agent is incorporated onto the surface of the coating. Here, the size of the particles of the agent is preferably from about 0.8 to 2.0 microns nominal diameter.

45

35

In all of the above coating processes for both the metal and resin type stents, the inorganic antimicrobial agent is present on one or both of the stent surface to perform the intended function of killing bacteria.

50

Polymeric Stent With Agent - As explained with respect to Figs. 2 and 3, the stent can be of a polymeric material that is prepared from a

55

5 suitable resin mixture containing the agent. Here, the agent is automatically available on both surfaces of the stent.

10 These resins with the agent can be prepared by first preparing a master batch concentrate of the antimicrobial agent. That is, particles of the  
5 ceramic zeolite in the resin base are blended with a polymeric resin, such as by kneading or molding. This master batch material is formed into pellets, which can be ground to any desired size. Methods for incorporating the  
15 antibiotic agent in the resin are described in U.S. Patents Nos. 4,938,955 and 4,906,464. Final formation of the stents from the resin incorporating the  
10 antimicrobial agent can be by compression molding or other conventional forming methods.  
20

The pellets of the master batch material is then added to untreated resin that is to be used to make the stent. The composite of the  
25 master batch and untreated resin preferably results in a final concentration by weight of between 0.1 to 30%, preferably 0.5 to 15%, most preferably 1 to  
15 10% of the agent zeolite particles. An example of a polymeric stent follows.

30	5.	Polymeric stent:	
20	resin	polyurethane, polyvinylchloride, silicone rubber	
35	agent	Ag in zeolite (AJ10N Shinagawa)	
25	wt%	0.1 to 20.0, more preferably 0.5 to 10.0 and most preferably 0.5 to 5.0 of agent in the resin of the stent	
40	size of agent particles	1.0 micron	
30			

45 Where polyurethane is to be used as the resin material for the stent, the polyurethane is in liquid form. The zeolite particles, preferably in a base polyurethane resin form but also in the normal ceramic particle state, can  
35 be added to untreated polyurethane liquid to make a master batch concentrate, which is then added to untreated polyurethane to make the resin  
50

5 to be formed into the stent. Alternatively, the zeolite particles in resin form or  
as the ceramic particles can be added directly into untreated polyurethane.  
The liquid polyurethane with the particles of the agent are then molded to  
10 make the stent. The stent has the agent throughout its entire body and on  
5 both surfaces.

The antibiotic particles are preferably present in a concentration  
by weight in the resin used to make the stent of from 0.01 to 10.0wt%,  
15 more preferably from 0.01 to 8.0 wt%, and most preferably from 0.1 to 5.0  
wt%. They are present on the surfaces of the stent contacted by the body  
10 fluid or body tissue.

20 A preferred embodiment of the resin with agent for making a  
polymeric stent has the following constituents:

25	15	plastic resin type	polyurethane
		material of agent	silver zeolite (preferably Shinagawa type AJ10N)
30	20	wt.% of agent in composite of the stent	1.0%
		size of the agent particles	0.8 - 25.0 microns

35 25 While specific amounts of the antimicrobial agent are given for  
the various types of stents, it should be considered that in each case that  
there is an amount of the agent that is sufficient to produce an effective  
40 concentration. This means that there is a sufficient amount of the  
antimicrobial agent used alone, added to or combined with other materials  
30 such as to prevent or inhibit the growth of bacterial and/or fungal organisms  
or to kill such organisms in the particular stent application. The amount of  
45 the agent will vary based on the specific agent used and the material with  
which it is mixed or added to and upon known factors such as type and use  
of the stent. Environmental factors such as body temperature also should be  
50 35 taken into consideration. It is within the ability of one skilled in the art to

5 relatively easily determine an effective amount of the antimicrobial agent to be used with each material.

10 As to the inorganic antimicrobial agent incorporated in the resin for the stent, into the liquid coating material or used in the coating powder, a number of metal ions, which are inorganic materials, have been shown to possess antibiotic activity, including silver, copper, zinc, mercury, tin, lead, bismuth, cadmium, chromium and thallium ions. These antibiotic metal ions are believed to exert their effects by disrupting respiration and electron transport systems upon absorption into bacterial or fungal cells. Antimicrobial metal ions (cations) of silver, gold, copper and zinc, in particular, are considered safe even for *in vivo* use. Antimicrobial silver cations are particularly useful for *in vivo* use due to the fact that they are not substantially absorbed into the body. That is, if such materials are used they should pose no hazard.

15 In one embodiment of the invention, the inorganic antibiotic metal containing composition is an antibiotic metal salt. Such salts include silver acetate, silver benzoate, silver carbonate, silver ionate, silver iodide, silver lactate, silver laureate, silver nitrate, silver oxide, silver palpitrate, silver protein, and silver sulfadiazine. Silver nitrate is preferred. These salts are particularly quick acting, as no release from ceramic particles is necessary to function antimicrobially.

20 Antibiotic ceramic particles useful with the present invention include zeolites, hydroxy apatite, zirconium phosphates or other ion-exchange ceramics. Zeolites are preferred, and are described in the preferred embodiments referred to below. Hydroxy apatite particles containing antimicrobial metals are described, e.g., in U.S. Patent No. 5,009,898. Zirconium phosphates containing antimicrobial metals are described, e.g., in U.S. Patent Nos. 5,296,238; 5,441,717; and 5,405,644.

25 Inorganic particles, such as the oxides of titanium, aluminum, zinc and copper, may be coated with a composition which confers antimicrobial properties, for example, by releasing antimicrobial metal ions

5 such as silver ions, which are described, e.g., in U.S. Patent No. 5,180,585. Inorganic soluble glass particles containing antimicrobial metal ions, such as silver, are described, e.g., in U.S. Patent Nos. 5,766,611 and 5,290,544.

10 Antibiotic zeolites are preferred. These have been prepared by replacing all or part of the ion-exchangeable ions in zeolite with ammonium ions and antibiotic metal ions, as described in U.S. Patent Nos. 4,938,958 and 4,911,898. Such zeolites have been incorporated in antibiotic resins (as shown in U.S. Patent Nos. 4,938,955 and 4,906,464) and polymer articles (U.S. Patent No. 4,775,585). Polymers including the antibiotic zeolites have been used to make refrigerators, dish washers, rice cookers, plastic film, chopping boards, vacuum bottles, plastic pails, and garbage containers. Other materials in which antibiotic zeolites have been incorporated include flooring, wall paper, cloth, paint, napkins, plastic automobile parts, catheters, bicycles, pens, toys, sand, and concrete. Examples of such uses are described in US Patents 5,714,445; 5,697,203; 5,562,872; 5,180,585; 5,714,430; and 5,102,401. These applications involve slow release of antibiotic silver from the zeolite particles.

30 Antibiotic zeolites are well-known and can be prepared for use in the present invention using known methods. These include the antibiotic zeolites disclosed, for example, in U.S. Patent Nos. 4,938,958 and 4,911,898.

40 Either natural zeolites or synthetic zeolites can be used to make the antibiotic zeolites used in the present invention. "Zeolite" is an aluminosilicate having a three dimensional skeletal structure that is represented by the formula:  $XM_{2n}O \cdot Al_2O_3 \cdot YSiO_2 \cdot ZH_2O$ . M represents an ion-exchangeable ion, generally a monovalent or divalent metal ion, n represents the atomic valency of the (metal) ion, X and Y represent coefficients of metal oxide and silica respectively, and Z represents the number of waters of crystallization. Examples of such zeolites include A-type zeolites, X-type zeolites, Y-type zeolites, T-type zeolites, high-silica zeolites, sodalite, mordenite, analcite, clinoptilolite, chabazite and erionite. The present



5

invention is not restricted to use of these specific zeolites.

10

The ion-exchange capacities of these zeolites are as follows:  
A-type zeolite = 7 meq/g; X-type zeolite = 6.4 meq/g; Y-type zeolite = 5  
meq/g; T-type zeolite = 3.4 meq/g; sodalite = 11.5 meq/g; mordenite = 2.6  
5 meq/g; analcite = 5 meq/g; clinoptilolite = 2.6 meq/g; chabazite = 5 meq/g;  
and erionite = 3.8 meq/g. These ion-exchange capacities are sufficient for  
the zeolites to undergo ion-exchange with ammonium and antibiotic metal  
15 ions.

20

The specific surface area of preferred zeolite particles is  
10 preferably at least 150 m<sup>2</sup>/g (anhydrous zeolite as standard) and the  
SiO<sub>2</sub>/Al<sub>2</sub>O<sub>3</sub> mol ratio in the zeolite composition is preferably less than 14,  
more preferably less than 11.

25

The antibiotic metal ions (cations) used in the antibiotic zeolites  
should be retained on the zeolite particles through an ion-exchange reaction.  
15 Antibiotic metal ions which are adsorbed or attached without an ion-exchange  
reaction exhibit a decreased bactericidal effect and their antibiotic effect is not  
long-lasting. Nevertheless, it is advantageous for imparting quick  
30 antimicrobial action to maintain a sufficient amount of surface adsorbed metal  
ion.

35

20 In the ion-exchange process, the antibiotic metal ions tend to be  
converted into their oxides, hydroxides, basic salts etc. either in the  
micropores or on the surfaces of the zeolite and also tend to deposit there,  
particularly when the concentration of metal ions in the vicinity of the zeolite  
surface is high. Such deposition tends to adversely affect the bactericidal  
40 properties of ion-exchanged zeolite.  
25

40

45

In an embodiment of the antibiotic zeolites, a relatively low  
degree of ion exchange is employed to obtain superior bactericidal properties.  
It is believed to be required that at least a portion of the zeolite particles retain  
metal ions having bactericidal properties at ion-exchangeable sites of the  
30 zeolite in an amount less than the ion-exchange saturation capacity of the  
zeolite. In one embodiment, the zeolite employed in the present invention  
50

50

55

5 retains antimicrobial metal ions in an amount up to 41 % of the theoretical  
ion-exchange capacity of the zeolite. Such ion-exchanged zeolite with a  
relatively low degree of ion-exchange may be prepared by performing  
10 ion-exchange using a metal ion solution having a low concentration as  
5 compared with solutions conventionally used for ion exchange.

The antibiotic metal ion is preferably present in the range of from  
15 about 0.1 to 20.0 wt.% of the zeolite. In one embodiment, the zeolite  
contains from 0.1 to 20.0 wt.% of silver ions and from 0.1 to 20.0 wt.% of  
copper or zinc ions. Although ammonium ion can be contained in the zeolite  
10 at a concentration of about 20.0 wt.% or less of the zeolite, it is desirable to  
20 limit the content of ammonium ions to from 0.5 to 15.0 wt.%, preferably 1.5  
to 5.0 wt.%. Weight% described herein is determined for materials dried at  
temperatures such as 110°C, 250°C or 550°C as this is the temperature  
25 employed for the preferred post-manufacturing drying process.

15 A preferred antibiotic zeolite is type A zeolite containing either a  
combination of ion-exchanged silver, zinc, and ammonium or silver and  
ammonium. One such zeolite is manufactured by Shinagawa, Inc. under the  
30 product number AW-10N and consists of 0.6% by weight of silver ion-  
exchanged in Type A zeolite particles having a diameter of about 2.5 $\mu$ .

20 Another formulation, AJ-10N, consists of about 2% by weight silver ion-  
35 exchanged in Type A zeolite particles having a diameter of about 2.5 $\mu$ .

Another formulation, AW-80, contains 0.6% by weight of silver ion-  
exchanged in Type A zeolite particles having a diameter of about 1.0 $\mu$ .

40 Another formulation, AJ-80N, consists of about 2% by weight silver ion-  
25 exchanged in Type A zeolite particles having a diameter of about 1.0 $\mu$ . These  
zeolites preferably contain about between 0.5% and 2.5% by weight of ion-  
exchanged ammonium. Other formulations also are available.

45 The zeolites are often obtained in master batches of low density  
polyethylene, polypropylene, or polystyrene, containing about 20.0 wt.% of  
30 the zeolite. Thus, they can be easily mixed with the resins used as materials  
50 for forming the composite resin used to make the stent or in the liquid coating

5

material.

10

The antibiotic properties of the antibiotic zeolite particles of the invention may be assayed while in aqueous formulations using conventional assay techniques, including for example determining the minimum growth inhibitory concentration (MIC) with respect to a variety of bacteria, eumycetes and yeast. In such a test, the bacteria listed below may be employed:

15

*Bacillus cereus var mycoides;*  
*Escherichia coli;*  
10 *Pseudomonas aeruginosa;*  
*Staphylococcus aureus;*  
20 *Streptococcus faecalis;*  
*Aspergillus niger;*  
*Aureobasidium pullulans;*  
25 15 *Chaetomium globosum;*  
*Gliocladium virens;*  
*Penicillium funiculosum;*  
*Candida albicans; and*  
30 *Saccharomyces cerevisiae.*

20

35

The assay for determining MIC can be carried out by smearing a solution containing bacteria for inoculation onto a plate culture medium to which a test sample of the encapsulated antibiotic zeolite particles is added in a particular concentration, followed by incubation and culturing of the plate.

25 The MIC is defined as a minimum concentration thereof required for inhibiting the growth of each bacteria.

40

45

Safety and biocompatibility tests were conducted on the antibiotic zeolites employed in the invention. ISO 10993-1 procedures were employed. The following results were obtained:

50

55

5

10

15

20

25

5

10

15

	Cytotoxicity: Non-Toxic
	Acute Systemic Toxicity: Non-Toxic
	Oral Toxicity: Safer than table salt
	Intracutaneous Toxicity: Passed
	Skin Irritation Test: Non-Irritant
	Chronic Toxicity: No Observable Effect
	<i>In-vitro</i> Hemolysis: Non-Hemolytic
	30-day Muscle Implant Test: Passed
	60-day Muscle Implant Test: Passed
	90-day Muscle Implant Test: Passed
	Ames Mutagenicity Test: Passed
	Pyrogenicity: Non-Pyrogenic

Thus, the antibiotic zeolites are exceptionally suitable under relevant toxicity and biocompatibility standards for use in the stents.

30

20

35

40

45

50

55

Specific features of the invention are shown in one or more of the drawings for convenience only, as each feature may be combined with other features in accordance with the invention. Alternative embodiments will be recognized by those skilled in the art and are intended to be included within the scope of the claims. All patent applications, patents, patent publications, and literature references cited in this specification are hereby incorporated by reference in their entirety. In the case of inconsistencies, the present description, including definitions, is intended to control. Accordingly, the above description should be construed as illustrating and not limiting the scope of the invention. All such obvious changes and modifications are within the patented scope of the appended claims.

## Claims

5

10

15

20

25

30

35

40

45

50

55

5

We Claim:

10

1                    1.     A medical stent comprising a metal, said stent having at  
2     least one surface which is to be contacted by body tissue or body fluid  
3     wherein said surface is coated with a composition containing antimicrobial  
4     zeolite particles.

15

1                    2.     The medical stent of claim 1, wherein said metal is  
2     selected from the group consisting of stainless steel, NiTi, tungsten, Ti-Nb-Zr  
3     alloy and tantalum.

20

1                    3.     The medical stent of claim 1 wherein said zeolite particles  
2     comprise from 0.5 to 75.0 wt. % of said composition.

25

1                    4.     The medical stent of claim 3 wherein said zeolite particles  
2     comprise from 0.1 to 20.0 wt. % of the resin stent.

30

1                    5.     The medical stent of claim 1 wherein said composition  
2     comprises a polymeric resin.

35

1                    6.     The medical stent of claim 5, wherein said polymeric resin  
2     is selected from the group consisting of hydrophilic polyurethane and silicone  
3     rubber adhesives.

40

1                    7.     The medical stent of claim 1, wherein said composition is  
2     coated on each of the inner and outer surfaces of said stent.

45

1                    8.     The medical stent of claim 1, wherein said antimicrobial  
2     zeolite particles comprise antimicrobial metal cations.

50

1                    9.     The medical stent of claim 7 wherein said antimicrobial  
2     metal ions are silver ions present in the form of a silver salt.

55

5

1                   10. The medical stent of claim 1 wherein said zeolite particles  
2 are from 0.5 to 2.5 microns.

10

1                   11. A medical stent comprising a polymeric resin, and  
2 antimicrobial zeolite particles, said stent having at least one surface which is  
3 to be contacted by body tissue or body fluid.

15

1                   12. The medical stent of claim 11, wherein said zeolite  
2 particles are coated on at least one surface of said stent.

20

1                   13. The medical stent of claim 11, wherein said polymeric  
2 resin is selected from the group consisting of polyurethane and polyvinyl  
3 chloride.

25

1                   14. A medical stent comprising a metal, said stent having at  
2 least one surface which is to be contacted by body tissue or body fluid  
3 wherein said surface is coated with a composition which comprises a  
4 coating containing an inorganic antimicrobial agent.

30

1                   15. The stent of claim 14, wherein said antimicrobial agent  
2 contains silver cations as the active ingredient.

35

1                   16. The sten of claim 14, wherein said antimicrobial agent  
2 comprises a ceramic carrier.

40

1                   17. A medical stent comprising a polymeric resin, and an  
2 inorganic antimicrobial agent, said stent having at least one surface which is  
3 to be contacted by body tissue or body fluid.

45

50

55

5

1                    18.    The stent of claim 17, wherein said antimicrobial agent  
2    contains silver cations as the active ingredient.

10

1                    19.    The sten of claim 17, wherein said antimicrobial agent  
2    comprises a ceramic carrier.

15

20

25

30

35

40

45

50

55



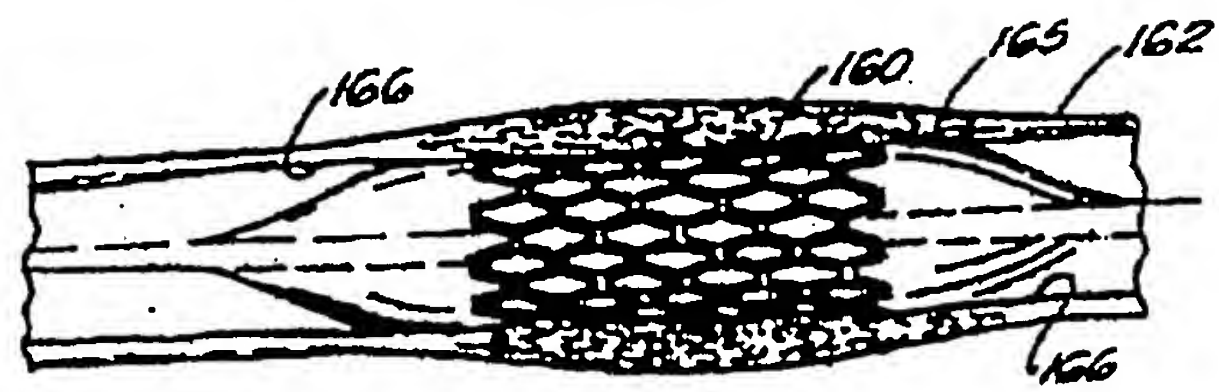


FIGURE 1

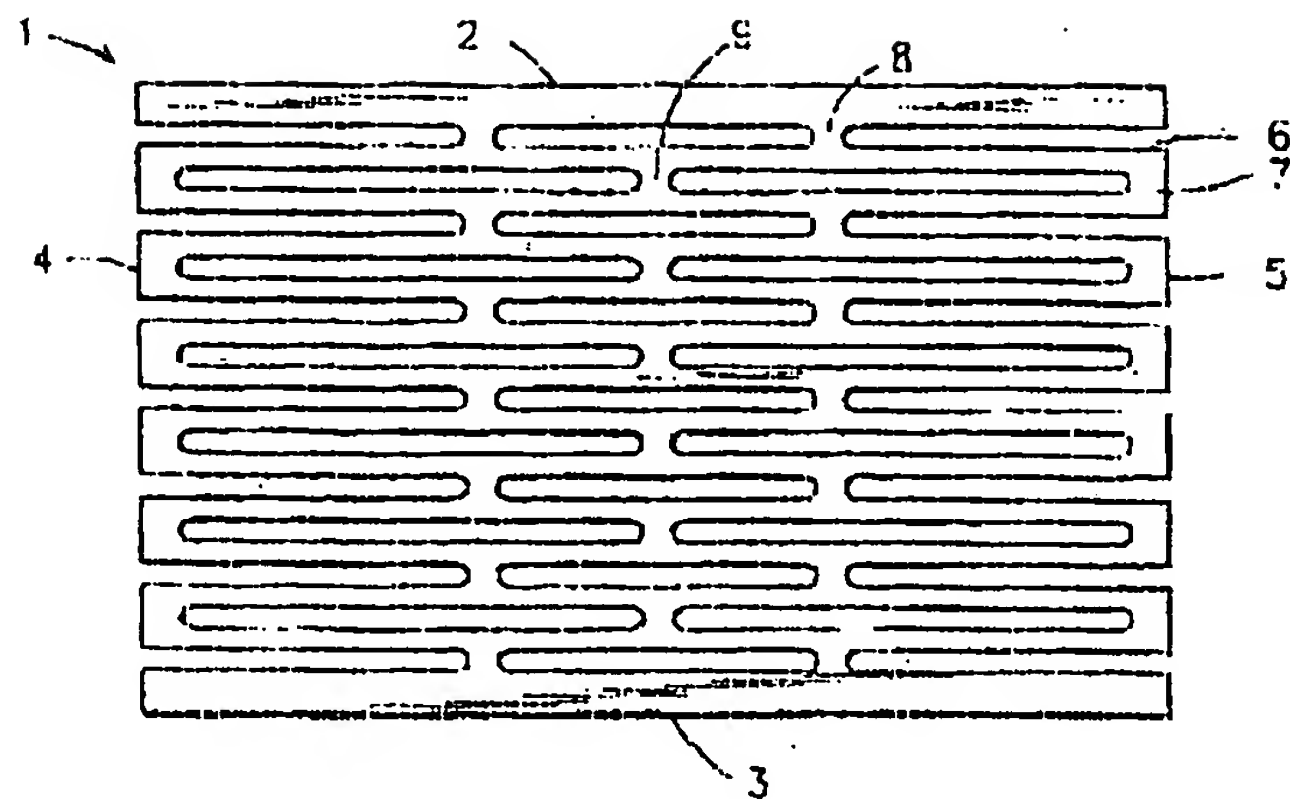
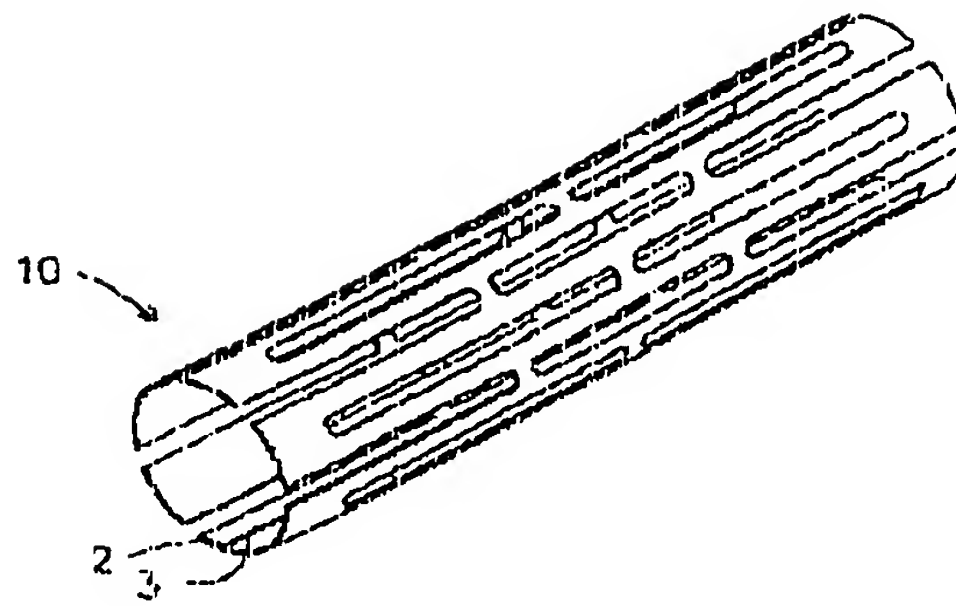


FIGURE 2



**FIGURE 3**

Inter.      nal Application No  
PCT/US 00/11092

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7    A61L31/02    A61L31/08    A61L31/12		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 7    A61L    C01B    C08K		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 31709 A (UNIV NEW YORK) 4 September 1997 (1997-09-04) page 9, line 18 - line 20 page 15, line 34 claims	1,3-19
Y	US 5 690 670 A (DAVIDSON JAMES A) 25 November 1997 (1997-11-25) cited in the application claims	1,2,7-9, 11,12, 14-19
Y	EP 0 301 717 A (MAEDA KARO) 1 February 1989 (1989-02-01)  claims	1,2,7-9, 11,12, 14-19
--- -/---		
<div style="display: flex; justify-content: space-between;"> <span><input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.</span> <span><input checked="" type="checkbox"/> Patent family members are listed in annex.</span> </div>		
* Special categories of cited documents : <div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 48%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&amp;" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search	Date of mailing of the international search report	
24 August 2000	05/09/2000	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 851 epo ri, Fax: (+31-70) 340-3018	Authorized officer  Thornton, S	

# INTERNATIONAL SEARCH REPORT

Inter      nal Application No  
PCT/US 00/11092

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 781 566 A (TOYO BOSEKI) 2 July 1997 (1997-07-02) claims 1-3,6-13,16 ---	1,3-19
A	DATABASE WPI Section Ch, Week 199521 Derwent Publications Ltd., London, GB; Class A96, AN 1995-157928 XP002145640 & JP 07 080080 A (NISSHO KK), 28 March 1995 (1995-03-28) abstract ---	1,3-19
A	EP 0 640 661 A (SHINETSU CHEMICAL CO) 1 March 1995 (1995-03-01) page 4, line 43 - line 48 claims ---	1,3-19
E	WO 00 30697 A (HEALTHSHIELD TECHNOLOGIES LLC) 2 June 2000 (2000-06-02) page 7, line 21 - line 25 claims -----	1-19

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. Appl. No.

PCT/US 00/11092

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9731709 A	04-09-1997	AU 2061297 A EP 0883438 A	16-09-1997 16-12-1998
US 5690670 A	25-11-1997	US 5477864 A US 5509933 A US 5169597 A AU 5219693 A CA 2110779 A EP 0601804 A JP 6233811 A US 5782910 A US 5716400 A US 5676632 A US 5562730 A US 5713947 A US 5685306 A US 5674280 A US 5683442 A US 5573401 A US 5545227 A AT 104865 T AU 644393 B AU 6827490 A CA 2032875 A DE 69008507 D DE 69008507 T DK 437079 T EP 0437079 A ES 2053126 T JP 6073475 A ZA 9010217 A	26-12-1995 23-04-1996 08-12-1992 16-06-1994 08-06-1994 15-06-1994 23-08-1994 21-07-1998 10-02-1998 14-10-1997 08-10-1996 03-02-1998 11-11-1997 07-10-1997 04-11-1997 12-11-1996 13-08-1996 15-05-1994 09-12-1993 27-06-1991 22-06-1991 01-06-1994 18-08-1994 30-05-1994 17-07-1991 16-07-1994 15-03-1994 30-10-1991
EP 0301717 A	01-02-1989	JP 1015056 A JP 1811051 C JP 4014992 B CA 1295554 A DE 3866048 A US 4923450 A	19-01-1989 27-12-1993 16-03-1992 11-02-1992 12-12-1991 08-05-1990
EP 0781566 A	02-07-1997	JP 9176379 A JP 9187501 A JP 9187502 A JP 10151191 A JP 10158432 A US 5783570 A	08-07-1997 22-07-1997 22-07-1997 09-06-1998 16-06-1998 21-07-1998
JP 7080080 A	28-03-1995	NONE	
EP 0640661 A	01-03-1995	JP 7062242 A DE 69421351 D DE 69421351 T US 5466726 A	07-03-1995 02-12-1999 30-03-2000 14-11-1995
WO 0030697 A	02-06-2000	NONE	